

EINBAUANLEITUNG CR-Twinrail

Einbauanleitung CR-Twinrail am Beispiel Toyota Yaris D-4D



The Box is placed between the pressure sensor from the Rail and the wiring loom from the engine.


Remove the cover over the injectors.

The second picture shows the place of the pressure sensor. Remove the connector from the sensor.

Place now the connector from the PSI-Box over the sensor. Connect the male connector from the Box on the female connector from the wiring loom.

You can remove the hose to have better access.

Place the Box on a secure place, protected from heat and vibrations

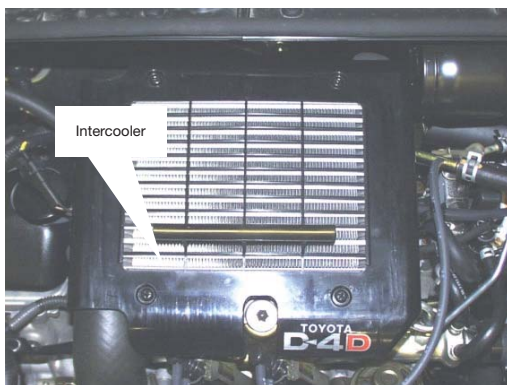

Le montage est ainsi terminé. Remettez le couvercle du moteur en place.

